

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):


- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)
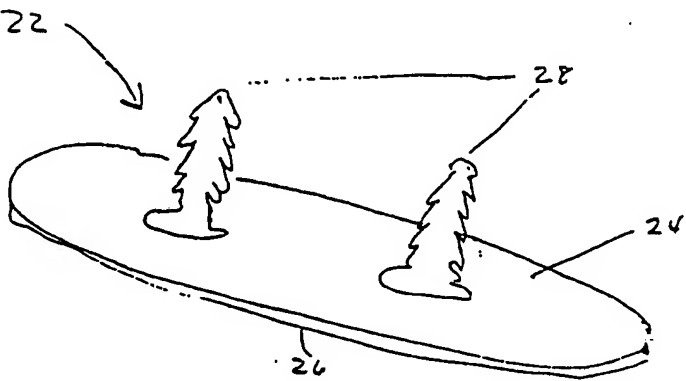
<b>(51) International Patent Classification <sup>5</sup> :</b>  <b>A61M 25/02</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 92/19309</b>  <b>(43) International Publication Date:</b> 12 November 1992 (12.11.92)
<p><b>(21) International Application Number:</b> PCT/US92/03923</p> <p><b>(22) International Filing Date:</b> 7 May 1992 (07.05.92)</p> <p><b>(30) Priority data:</b>          697,640                      8 May 1991 (08.05.91)                      US</p> <p><b>(71)(72) Applicant and Inventor:</b> BIERMAN, Steven, F. [US/US]; 143 Eighth Street, Del Mar, CA 92014 (US).</p> <p><b>(74) Agents:</b> SHREVE, William, H. et al.; Knobbe, Martens, Olson and Bear, 620 Newport Center Drive, Suite 1600, Newport Beach, CA 92660 (US).</p>		<p><b>(81) Designated States:</b> AT (European patent), AU, BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, LU (European patent), MC (European patent), NL (European patent), SE (European patent).</p> <p><b>Published</b>  <i>With international search report.          Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p><b>(54) Title:</b> ANCHOR PAD FOR CATHETERIZATION SYSTEM</p> <div style="text-align: center; margin: 20px 0;">  </div> <p><b>(57) Abstract</b></p> <p>An anchor pad (22) is disclosed having a self-adhesive material applied to one surface (26) of the pad (22) and one or more barbed uprights (28) extending from the opposite surface (24) of the pad (22) in order to securely engage the suture holes (14) of a central line catheter (10). The barbs (28) permit slidable engagement with the catheter (10) but prevent disengagement. In order to remove the catheter (10), the barbs (28) can be easily snipped or cut.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	MI	Mali
AU	Australia	FR	France	MN	Mongolia
BB	Barbados	GA	Gabon	MR	Mauritania
BE	Belgium	GB	United Kingdom	MW	Malawi
BF	Burkina Faso	GN	Guinea	NL	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IE	Ireland	RO	Romania
CA	Canada	IT	Italy	RU	Russian Federation
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark	MG	Madagascar		
ES	Spain				

**ANCHOR PAD FOR CATHETERIZATION SYSTEM**Background of the InventionField of the Invention

5 The present invention relates to an anchor pad for an intravenous catheterization connector, and, more particularly, to an anchor pad for use with a triple-lumen connector.

Description of the Related Art

10 It is very common in the treatment of patients to utilize intravenous ("IV") catheters to introduce fluids and medications directly into the bloodstream. In many cases, and particularly with respect to cardiac therapy, the IV catheter is introduced into a central line or a larger vein located close to the patient's heart. In such circumstances, long term infusion typically requires that the catheter remain in place for many days. In order to secure such a central line IV catheter in position at the injection site, the IV tubing is commonly mounted on a thin flexible pad or seat which is then sutured to the patient's skin. This combination of tubing and pad comprises a connector to which one or more other IV supply lines having compatible connectors can be attached. In one example, a triple-lumen connector sold under the brand name ARROW® provides three separate supply lines for secondary IV fluids or manual injection sites.

20 A number of problems, however, have arisen with respect to such central line connectors such as the triple-lumen connector described above. First, suturing the pad to the patient's skin is painful. Also, with the passage of time, the sutures frequently tear through the soft plastic material comprising the seat of the connector, thus permitting movement of the connector in the injection site and adding to the pain and discomfort of the patient. Even if they do not tear, the sutures may loosen to such an extent that 2 to 3 mm of movement occurs in and out of the injection site. This movement is not only painful to the patient, but also fosters bacteria infections at the site. It is estimated that there are approximately 50,000 catheter infections per year, many of which are due to problems such as those described above.

Thus, there is a need for a more secure means for attachment of a central line catheter to the body of the patient at the injection site.

#### Summary of the Invention

5       The present invention comprises an anchor pad which securely fastens onto the body of the patient by means of an adhesive applied to one planar side of the pad. The opposite planar side of the pad includes one or more barbed uprights which engage the suture holes commonly found in typical  
10       central line connectors, such as the triple-lumen connector described above. In the preferred embodiment, the barbed uprights correspond to the number, size and spacing of the connector suture holes.

15       The triple-lumen connector mounts on the anchor pad of the present invention by aligning the suture holes in the plastic seat of the connector over the barbed uprights on the anchor pad. The connector is then pressed down over the barbs until the connector is secure. The configuration of the barbs permits movement of the connector toward the body of the  
20       patient but prevents movement in the opposite direction, thus preventing accidental disengagement.

25       When it is necessary or desirable to remove the central line connector, the barbs can be easily and quickly snipped off above the connector to allow the connector to lift off of the barbed stumps away from the patient. Thus, the pain and discomfort associated with such central line catheters is avoided, while at the same time providing a secure connection.

#### Brief Description of the Drawings

30       Figure 1 is a perspective view of a typical triple-lumen central line catheter having a seat with a pair of suture holes formed therein.

      Figure 2 is a perspective view of the anchor pad of the present invention illustrating a pair of upstanding barbs to receive the suture holes of the connector.

#### Detailed Description of the Invention

35       Referring to Figure 1, there is shown a typical triple-lumen central line catheter 10 of the type manufactured under

-3-

the ARROW® brand name. Although the present invention is illustrated and described herein in connection with a triple-lumen catheter, it should be understood that the principles of the invention apply equally well to other types of catheters with various configurations.

The triple-lumen catheter 10 of Figure 1 comprises a central planar seat 12 formed of a soft pliable plastic, having a pair of suture holes 14 formed therein. Extending away from the seat in one direction is a cannula 16 which inserts into the injection site 17 in the body of the patient, in accordance with standard catheterization procedures. Extending away from the seat in the opposite direction are three lengths of IV tubing 18, each ending in a standard IV connector 20, such as, for example, a lure-type lock or septum cap. These standard IV connectors 20 can receive compatible connectors (not shown) formed on the end of IV supply tubing, or can receive manual injections for administering medication or other fluids directly into a central vein of the patient.

In order to secure the triple-lumen catheter 10 at the injection site, the seat 12 is typically positioned on the body and sutured to the skin of the patient by means of the suture holes 14. Over time, however, as explained above, the sutures either loosen or tear completely through the seat material. The patient experiences pain and discomfort, and risks infection as a result.

Referring to Figure 2, there is shown the anchor pad 22 of the present invention comprising a planar pad 24 having a self-adhesive material applied to the bottom surface 26 thereof. The adhesive secures the anchor pad 22 to the patient's body without sutures.

A pair of barbed uprights 28 integrally mount on the opposite side 24 of the pad 22. The barbs 28 are spaced and configured to receive the suture holes 14 on the seat 12 of the triple-lumen catheter 10 (shown in Figure 1). In addition, the diameter of the cylindrical portion of the uprights (not including the barbs) is sized to slightly deform

-4-

the seat of the connector as it press fits onto the pad. Preferably, the seat deforms elastically to be securely retained on the anchor pad.

5 It will be noted that the barbs 28 elastically permit the seat 12 to pass down over the jagged edges of the barbs, but prevent movement of the seat in the opposite direction. Thus, the anchor pad of the present invention securely mounts the seat of the triple-lumen catheter on the patient's body. Not only is the patient relieved of pain, but the risk of complete  
10 or partial disengagement is eliminated.

In order to remove the catheter, the barbs are simply snipped off so that the seat can be easily lifted over the remaining stumps. The pad is then removed from the patient with minimal discomfort. The barbs are constructed from a  
15 material which is less elastic than the material comprising the connector seat but which is easily severable.

Therefore, the anchor pad of the present invention presents a significant advance in the use and attachment of central line catheters. While the preferred arrangement of  
20 the present invention has been illustrated and described, it should be understood that various changes and modifications to the system illustrated will readily come to mind which fall within the scope of the invention as set forth in the appended claims.

WHAT IS CLAIMED IS:

1. An apparatus for securing a catheter to the body of a patient wherein said catheter is provided with a substantially planar seat having suture holes formed therein,  
5 the apparatus comprising:

an adhesive member for secure attachment to the body of the patient; and

at least one retention member mounted on said adhesive spaced and configured to correspond with at least one of said suture holes for receiving said seat of  
10 said catheter in slidable engagement, said retention member preventing accidental disengagement of said catheter.

2. The apparatus of Claim 1, wherein said retention member is barbed, permitting said slidable movement in one  
15 direction only.

3. The apparatus of Claim 2, wherein said apparatus includes a plurality of barbed retention members positioned on said adhesive member so as to be in alignment with said suture  
20 holes.

4. The apparatus of Claim 1, wherein the diameter of said retention member is slightly larger than that of said suture hole.

5. A method for attaching an intravenous catheterization connector to a body of a patient, comprising the steps of:

providing an anchoring apparatus having an adhesive member and at least one retention member, said retention member extending outwardly from said adhesive member;

30 placing said adhesive member on said patient body to secure said anchoring apparatus thereon with said retention member extending away from said patient body;

coupling said intravenous catheterization connector with said retention member in a manner preventing  
35 unintentional disengagement between the retention member and the intravenous catheterization connector.



6. The method of claim 5, additionally comprising the step of configuring said retention member with a plurality of barbs radially extending towards said adhesive member acute to a longitudinal axis of the retention member, and wherein said  
5 coupling step comprises inserting said retention member into a hole of said intravenous catheterization connector by elastically deforming said barbs to permit said retention member to insert into said hole but to prevent said retention member from extracting from said hole.



10 7. The method of Claim 6, additionally comprising the steps of:

providing a plurality of retention members corresponding to the number of holes in said intravenous catheterization connector;

15 positioning said retention members on said anchoring apparatus such that each retention member position corresponds with a hole position of said intravenous catheterization connector.

20 8. The method of Claim 5, additionally comprising the step of:


severing the retention member between said adhesive member and said connector to permit disengagement between said connector and said adhesive member.

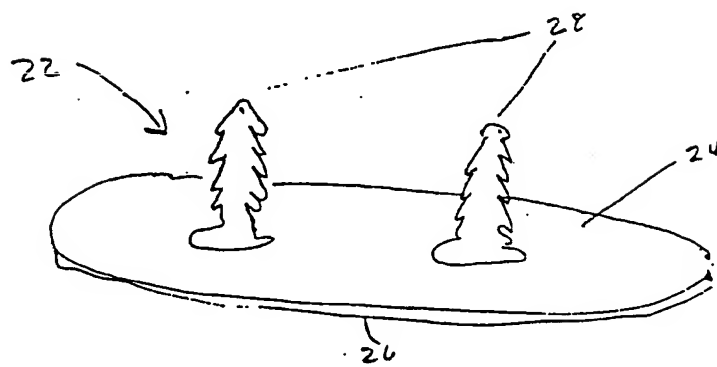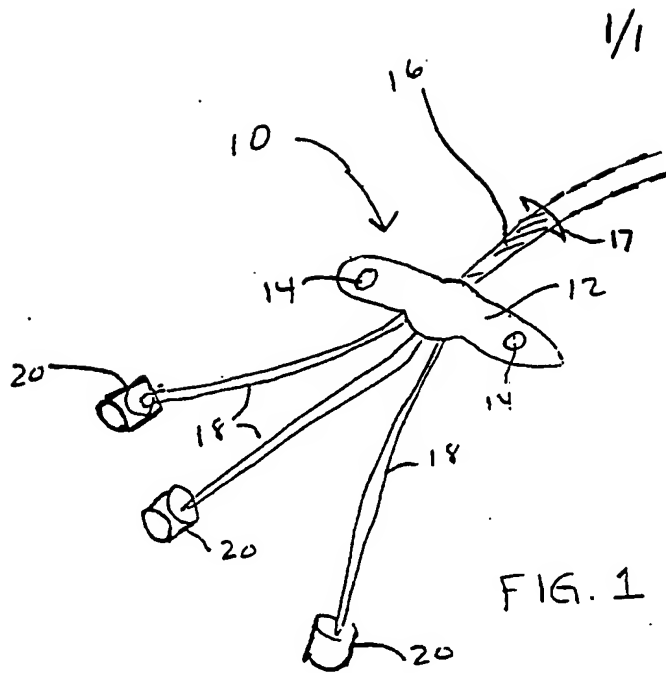

## INTERNATIONAL SEARCH REPORT

PCT/US 92/03923

International Application N

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (If several classification symbols apply, indicate all) <sup>6</sup>		
According to International Patent Classification (IPC) or to both National Classification and IPC		
Int.Cl. 5 A61M25/02		
<b>II. FIELDS SEARCHED</b>		
Minimum Documentation Searched <sup>7</sup>		
Classification System	Classification Symbols	
Int.Cl. 5	A61M	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched <sup>8</sup>		
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT<sup>9</sup></b>		
Category <sup>10</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>
A	FR,A,2 381 529 (TAUT, INC.) 22 September 1978 see page 1, line 34 - page 2, line 15; figures	1-8
A	WO,A,8 001 458 (WHITMAN MEDICAL CORP.) 24 July 1980 see abstract; figures	1-8
A	US,A,4 857 058 (PAYTON HUGH W.) 15 August 1989 see abstract; figures	1-8
A	EP,A,0 064 284 (NESSLER) 10 November 1982 see page 4, last paragraph - page 5, last paragraph; figures	1-8
-/--		
<p><sup>10</sup> Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"A" document member of the same patent family</p>		
<b>IV. CERTIFICATION</b>		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
17 SEPTEMBER 1992	06.10.92	
International Searching Authority	Signature of Authorized Officer	
EUROPEAN PATENT OFFICE	MIR Y GUILLEN V. 	

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)	
Category *	Citation of Document, with indication, where appropriate, of the relevant passages
A	US,A,3 602 227 (ANDREW) 31 August 1971 see abstract; figures 1-4 -----
	8

**ANNEX TO THE INTERNATIONAL SEARCH REPORT  
ON INTERNATIONAL PATENT APPLICATION NO. US 9203923  
SA 60760**

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 17/09/92

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR-A-2381529	22-09-78	US-A- 4129128	12-12-78
		BE-A- 864259	16-06-78
		CA-A- 1133781	19-10-82
		DE-A- 2803395	24-08-78
		JP-A- 53115597	09-10-78
-----			
WO-A-8001458	24-07-80	US-A- 4224937	30-09-80
		US-A- 4250880	17-02-81
		BE-A- 887056	04-05-81
		EP-A- 0022846	28-01-81
		US-A- 4397647	09-08-83
-----			
US-A-4857058	15-08-89	None	
-----			
EP-A-0064284	10-11-82	DE-A- 3117416	18-11-82
-----			
US-A-3602227	31-08-71	None	
-----			